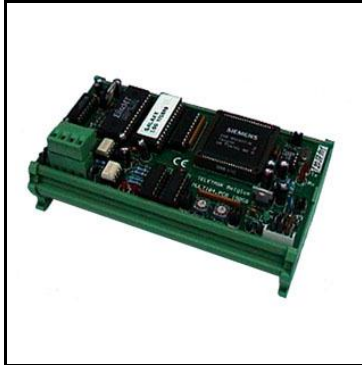


Galaxy interface 8 zones
TDS14020


Interface between the Galaxy security system and the TELETASK system.

Application:

This interface makes it possible to use up to 8 motion detectors of the Security system to control up to eight domotics functions. The detector status is automatically transmitted to the TELETASK system via the interface.

Characteristics:

The TELETASK Galaxy interface is to be connected to the Galaxy RS232 interface.
The Galaxy 8, 18, 60 and 500 security systems are supported with this interface.

Settings:

Functions

through PROSOFT

AUTOBUS address

through rotary switches ROT1 + ROT2:

MICROS: from 6 to 25

COMPACT: from 01 to 40

PROJECT: from 01 to 99

Installation:

DIN rail mounting

Connections:

AUTOBUS:

by enclosed AUTOBUS connector

Galaxy serial interface:

Screw terminals (4 wires)

Dimensions:

Width:152; height: 78; depth: 48 (in mm)
About 8,5 modules

Power Consumption

Minimum

90 mA


Medium

90 mA

Maximum

90 mA

Schematic Drawing:

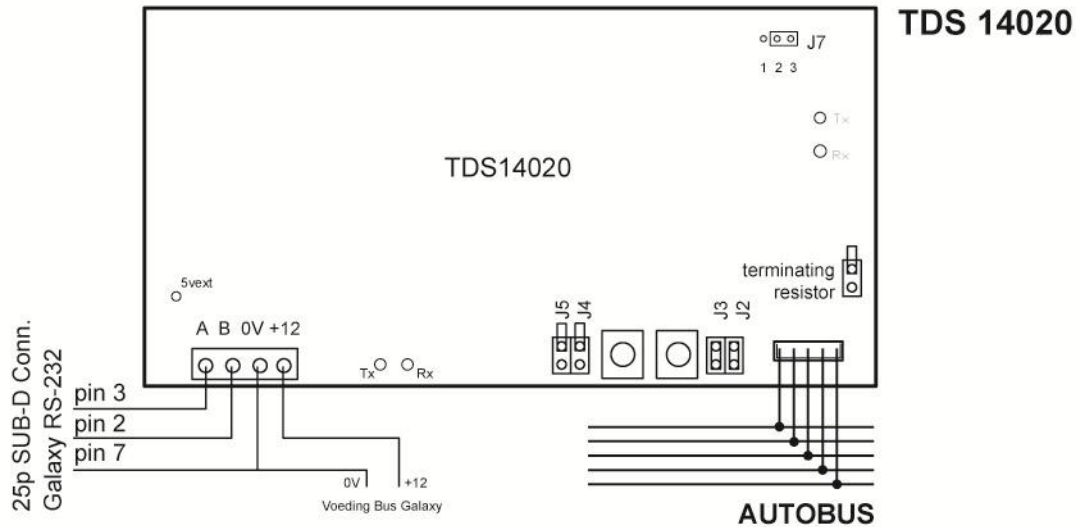

JP 2	JP3	AUTOBUS Rate	JP 4	JP5	# addresses
OPEN	OPEN	1200	OPEN	OPEN	4 (standard)
OPEN	GESLOTEN	2400	OPEN	GESLOTEN	3
GESLOTEN	OPEN	4800	GESLOTEN	OPEN	2
GESLOTEN	GESLOTEN	9600 (standard)	GESLOTEN	GESLOTEN	1